

HTY505DAUS15

Family	Dishwasher
Subfamily	Hoodtype dishwasher
Basket dimensions	500x500 mm
Power connection	400 V 3N~ / 13 A / 6,7 kW / 50 Hz
Width	620 mm
Depth	736 mm
Height	1530 mm
Usable load height	440 mm



Distribution

Solutions	Bars/Cafes; Schools
-----------	---------------------

Aesthetics

Serie	Ecoline	Led color	Red
Control panel	Electronic		

Functions



Functionality	GN 1/1 trays washing; Triple filter; HTR; Door clearance 440mm
---------------	--

Programs

Programs

Boiler 85°C/Tank 60°C-1'30"	Boiler 85°C/Tank 60°C-2'30"	Boiler 85°C/Tank 60°C-4'
Drain and self cleaning cycle	Yes	
Maximum basket/hour	40	
Maximum dishes/hour	720	

Interface

Panel	Ecoline 2016	Cycle progress alert	Yes
Display	4 digit	End-cycle alert	Yes
Number of buttons	5	Manual diagnostic	Yes
On/Off button	Yes		

Construction

Tank	Deep drawn	Rinse spray arm	Stainless steel
Tank construction	Double wall	Hood	Single wall
Tank material	Stainless steel AISI 304	Tank capacity	14 l
Back panel	Prepainted	Boiler capacity	8 l
Tank filter	Stainless steel	Net weight	106.000 kg
Washing spray arm	Stainless steel	Drain max. height	1000 mm

Consumption and connections

Tank heating element	2200 W	Water cycle consumption	2,7 l
Boiler heating element	6000 W	Water inlet	Warm 50°C
Washing pump	700 W	Max temperature inlet water	60°C
Default connection	6700 W	Max water hardness	12°fH - 7°dH
Electrical connection option	230 V~ / 12 A / 2,7 kW / 50 Hz; 230 V~ / 21 A / 4,7 kW / 50 Hz; 400 V 3N~ / 13 A / 4,7 kW / 50 Hz	Water inlet	Cold 15°C

Electrical Connection

Plug	Australian 13 AMP
-------------	-------------------

Manuals and Certifications

Certificate	CE, Watermark
--------------------	---------------

Equipments


Peristaltic detergent doser	Yes, electronic control	Default chemicals dosing unit of measure	gr/lit
Peristaltic detergent doser	Yes, manual	Drain pump with 3 stage filter system	Yes
Peristaltic rinse-aid doser	Yes, electronic control	Rinse pump H.T.R. system	Rinse pump with atmospheric boiler
Detergent load	Yes, manual	Break tank	Yes
Peristaltic detergent doser	Yes, manual	Partial renewal of water in the tank and built-in drain pump	Si
Rinse load	Yes, manual	Water supply pipe diameter	16 mm
Soft Start	Yes		
Boiler thermostat	Yes default ON		
Cycle counter	Yes		

Drain supply pipe diameter	21,5 mm
Automatic start	Yes, default OFF
Trays washing option GN1/1 530x325mm	Yes

Accessories Included

Dish basket	PB50D01
Cutlery basket	PHOOS02
Flat basket	1x PB50G02

Water supply pipe	In acciaio Watermark
Drain pipe	Yes - 2m

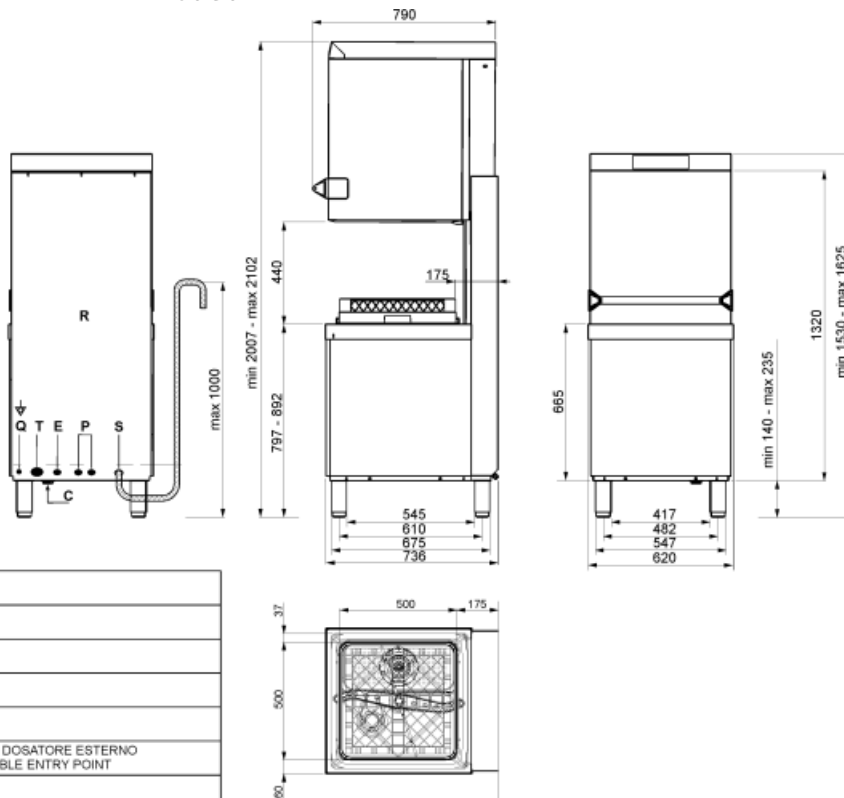

Not included accessories



WT5700SR

Entry table right side 700mm



WTX51200

Exit table both sides 1200mm



WT51200SR

Entry table right side 1200mm



PHOOS03

Basket in polypropylene with 6 compartments for cutlery for Capote



WT5700SL

Entry table left side 700mm



WT51200SHL

Entry table left side 1200mm



WH00S01

Wire insert for 12 small dishes



PHOOS01

Single basket in polypropylene for cutlery



WTX5700R

Exit table right side 700mm



WB50T02

Wire basket for 5 trays 600x500



WTX51200L

Exit table left side 1200mm



WT51200SHR

Entry table right side 1200mm




WB50G01

Universal wire basket with flat bottom 500x500



WT51200SL

Entry table left side 1200mm



PB50D01

Basket made of polypropylene for 18 plates 500x500



WB50G02

Wire basket for glasses with inclined bottom 500x500



WTX51200R

Exit table right side 1200mm



PB50G01

Universal basket in polypropylene 500x500



WB50G04

Wire basket for glasses with inclined bottom 500x500



WTX5700

Exit table both sides 700mm



PHOOS02

Basket in polypropylene for cutlery with 6 compartments



WB50D01

Wire basket for 18 dishes and trays 500x500



WB50G03

Wire basket for glasses with inclined bottom 500x500



WTX5700L

Exit table left side 700mm

Symbols glossary (TT)

