



G L O B A L
T A P W A R E



GLOBAL Rinse-Mate Pre-Rinses

“Mr. Plumber this book must remain with the product for the End User,
please do not remove and throw away.”

INSTALLATION INSTRUCTIONS

“It is important that you read this before Installation. Please do not assume you know,
as we may have made changes”

This Product Part No. : _____

(Find Details inside and read all instructions relevant for this product)

Installation date:___/___/___ Installing Plumbing Company _____

This Product has a 24month warranty period from the install date.
T&C on our Website.

If you have any problems or are unsure about something, then contact with us
via any method below.

P: 1300 85 25 15 **P:** 07 3855 2350 **E:** sales.info@globaltapware.com



Product Features & / or Changes:

- 1 – Since early 2020 we started to work on changes to the components for our other brand, Global Fisher. This has led to the combining of some of these changes in with our Rinse-Mate brand, such as the spray guns, hoses, wall brackets, springs & hooks.
- 2 – We have sourced a new supplier of Watermarked Inlet hoses that uses Nylon for the braiding. This is a preferable material as it eliminates the possibility of Corrosion of the S/S Braiding.
- 3 – We also introduced late last year the 'Triple Interchangeable Spray Tips' for our Fisher range and have carried it over into our Rinse-Mate models. These were brought about by end users enquiring about having / using different sprays for different applications. Along with these tips we developed a wall mounted Bracket to hold the spare tips & the Tool. This is sold separately.
- 4 – Another development we have been working on from early 2020 is the Pre-Rinse Hose. It is now fully Stainless Steel with ½" Swivel Female ends. The Inner Tube is made from Santoprene with S/S Braiding to give added strength. It is then covered with a strong S/S Armourflex spiral hose which is locked in at each end.

This hose has been tested to Australian Standards – AS4020 (Taste, Odour & Bacteria growth) along with AS3499 (Flexible Hoses). It passed both tests.

- 5 – The Mounting kit underneath on the Dual Hob taps now comes with a Special Designed cut-out 3mm S/S Plate called a "Fix-A-Plate" for giving added strength underneath the sink. It is designed to spread the Upward Pressure Load to a wider area, helping the tap to seal across the whole of tap base surface.

Note – These plates are now sold in bundles of 6 for general use. **Pt. No. GA-FP-6S**

- 6 – Global Rinse-Mate pre-rinses are made here in Australia at our Brisbane factory. We use a mix of imported components along with a majority of Australian Made components and they all come together in our factory. We Assemble & Pressure test all the Pre-Rinse Sub-Assemblies (the components above the tap) to make sure no leaks occur. We pressure check the inlet hoses on the dual hob taps before packing.
- 7 – This Range has been Certified "Australian Made". Something no one else can say who make/sell pre-rinses here in Australia.

The one thing we DO NOT do is import a fully made pre-rinse from Asia, unlike our competitors.



GLOBAL RINSE-MATE HOB / DECK Mount

Mr. Plumber,

This 'Global Rinse-Mate' Pre-Rinse product has been Pre-assembled & Tested in our Factory for leaks – You have this product as no issues were detected. We use Red Loctite 263 or 277 on all Mechanical Joints.

To install is now only a 4-stage easy fit-off.

1 - **Fit the Tap Body to the Hob / Sink.**

2 – **Drop in Riser Sub-Assembly.** But first grease O'Rings. Hand tighten nut - light nip up. Same for spout if that applies.

3 – **Slide Hose through Spring Guard,** then Fit Hook over Spring Retainer & Screw on Hose & Spring Guard –Then fit Spray Gun. -- use Fibre washers provided -- Make sure gun rotates freely.

4 – **Fit Wall Bracket to suit.** – Hook Gun & Hose back w- hook. Measure distance for rod TWICE & cut once.

5 - **Carry out water pressure test.** Remove Spray Valve & Aerator first so no rubbish gets caught. Check that all is working ok. Refit Aerator & Gun.

6 – The standard Spray Gun comes with 3 interchangeable Spray Tips.



You may wish to change to suit various applications. . – **LEAVE others in Packet attached to Gun**

Regards
Mark McQueen
Managing Director.

DO NOT INSTALL SPRINGS Other WAY AROUND

DO NOT CUT WALL BRACKET ROD SHORT – Contact us immediately if you do.
DO NOT push Top Assembly Riser Backwards – leave in its natural rest state.



The new
**"Drop 'N
Lock"**
System
used on all
Pre-Rinses

Tall = GRM012100
Café = GRM012100-C

GRM032100
GRM032100-C

Applies to MIDI Ranges also

GRM012512
GRM012512-C

GRM032512
GRM032512-C


Other Spouts sizes available

GLOBAL RINSE-MATE HOB / DECK Mount

Mr. Plumber,

This 'Global Rinse-Mate' Pre-Rinse product has been Pre-assembled & Tested in our Factory for leaks – You have this product as no issues were detected. We use Red Loctite 263 or 277 on all Mechanical Joints.

To install is now only a 4-stage easy fit-off.

- 1 - **Fit the Tap Body to the Hob / Sink.**
- 2 – **Drop in Riser Sub-Assembly.** But first grease O'Rings. Hand tighten nut - light nip up. Same for spout if that applies.
- 3 – **Slide Hose through Spring Guard,** then Fit Hook over Spring Retainer & Screw on Hose & Spring Guard –Then fit Spray Gun. -- use Fibre washers provided -- Make sure gun rotates freely.
- 4 – **Fit Wall Bracket to suit.** – Hook Gun & Hose back w- hook. Measure distance for rod **TWICE** & cut once.
- 5 - **Carry out water pressure test.** Remove Spray Valve & Aerator first so no rubbish gets caught. Check that all is working ok. Refit Aerator & Gun.
- 6 – The standard Spray Gun comes with 3 interchangeable Spray Tips.  You may wish to change to suit various applications. . – **LEAVE others in Packet attached to Gun**

DO NOT INSTALL SPRINGS Other WAY AROUND

Regards
Mark McQueen
Managing Director.

DO NOT CUT WALL BRACKET ROD SHORT – Contact us immediately if you do.
DO NOT push Top Assembly Riser Backwards – leave in its natural rest state.

The new
**"Drop 'N
Lock"**
System
used on all
Pre-Rinses



Tall = GRM052100

GRM062100

GRM052512

GRM062512

Café = GRM052100-C

GRM062100-C

GRM052512-C

GRM062512-C

Applies to MIDI Ranges also


Other Spouts sizes available

GLOBAL RINSE-MATE WALL Mounts

Mr. Plumber,

This 'Global Rinse-Mate' Pre-Rinse product has been Pre-assembled & Tested in our Factory for leaks – You have this product as no issues were detected. We use Red Loctite 263 or 277 on all Mechanical Joints.

To install is now only a 4-stage easy fit-off.


- 1 – **Fit the Tap Body / Outlet to the Wall / Splashback**
- 2 – **Drop in Riser Sub-Assembly.** But first grease O'Rings. Hand tighten nut then give a light nip up. Same for spout if that applies.
- 3 – **Slide Hose through Spring Guard,** then Fit Hook over Spring Retainer & Screw on Hose & Spring Guard –Then fit Spray Gun. -- use Fibre washers provided -- Make sure gun rotates freely.
- 4 – **Fit Wall Bracket to suit.** – Hook Gun & Hose back w- hook. Measure distance for rod TWICE & cut once.
- 5 – **Carry out water pressure test.** - Remove Spray Valve & Aerator first so no rubbish gets caught. Check that all is working ok. Refit Aerator & Gun.
- 6 – The Standard Spray Gun comes with 3 interchangeable Spray Tips.  You may wish to change to suit various applications. – **LEAVE others in Packet attached to Gun.**

Regards
Mark McQueen
Managing Director.

DO NOT INSTALL SPRINGS Other WAY AROUND

DO NOT CUT WALL BRACKET ROD SHORT – Contact us immediately if you do.
DO NOT push Top Assembly Riser Backwards – leave in its natural rest state.

The new
"Drop 'N
Lock"
System
used on all
Pre-Rinses

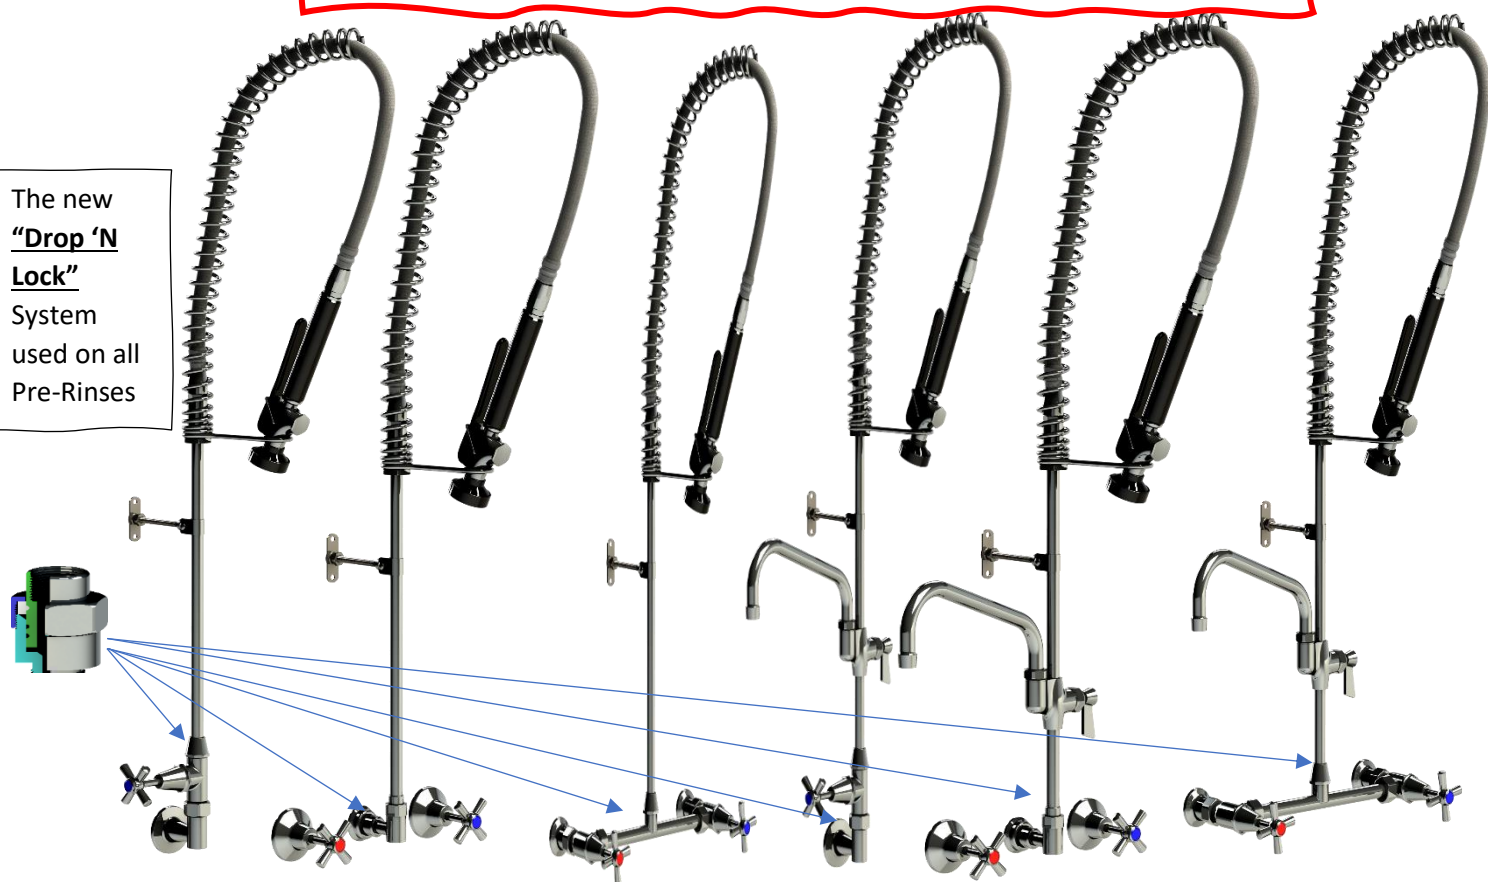

Tall = GRM112100

GRM132100

GRM152100

GRM112512

GRM132512

GRM152512

Café = GRM112100-C

GRM12100-C

GRM152100-C

GRM112512-C

GRM132512-C

GRM152512-C

Applies to MIDI Ranges also

other Spouts sizes available

GLOBAL RINSE-MATE WALL Mounts

Mr. Plumber,

This 'Global Rinse-Mate' Pre-Rinse product has been Pre-assembled & Tested in our Factory for leaks – You have this product as no issues were detected. We use Red Loctite 263 or 277 on all Mechanical Joints.

To install is now only a 4-stage easy fit-off.

1 - **Fit the Tap Body / Outlet to the Wall / Splashback**

2 – **Drop in Riser Sub-Assembly.** But first grease O'Rings. Hand tighten nut then give a light nip up. Same for spout if that applies.

3 – **Slide Hose through Spring Guard,** then Fit Hook over Spring Retainer & Screw on Hose & Spring Guard –Then fit Spray Gun. -- use Fibre washers provided -- Make sure gun rotates freely.

4 – **Fit Wall Bracket to suit.** – Hook Gun & Hose back w- hook. Measure distance for rod TWICE & cut once.

5 - **Carry out water pressure test.** - Remove Spray Valve & Aerator first so no rubbish gets caught. Check that all is working ok. Refit Aerator & Gun.

6 – The Standard Spray Gun comes with 3 interchangeable Spray Tips.



You may wish to change to suit various applications. – **LEAVE others in Packet attached to Gun.**

Regards
Mark McQueen
Managing Director.

DO NOT INSTALL SPRINGS Other WAY AROUND

**DO NOT CUT WALL BRACKET ROD SHORT – Contact us immediately if you do.
DO NOT push Top Assembly Riser Backwards – leave in its natural rest state.**

The new
**"Drop 'N
Lock"**
System
used on all
Pre-Rinses



Tall = GRM152100
Cafe = GRM152100-C

GRM162100
GRM162100-C

Applies to MIDI Ranges also

GRM152512
GRM152512-C

GRM162512
GRM162512-C

other Spouts sizes available

Step 1 – Remove the existing Spray tip.

Remove this tip



w/ Socket or Shifter.



Clean Inside of thread



Step 2 – Fit new 'Male Core'.

Use a liquid type thread sealant – e.g. -'Loctite / Locseal / plumbers goo. Use a 6mm Allen Key to fit.

IMPORTANT – Fit Bumper back on the gun first before fitting male core.



Step 3 – Choose the spray tip / head you require.

Hand screw on the spray tip / head you want to use and give it a slight nip up with shifter.




This wall Holder & tool available -Pt. No. **GTSH-T**




1 - Shower Spray (**fitted to Gun**)

2 - Flat Fan Spray


3 - Straight Pulse Jet Spray

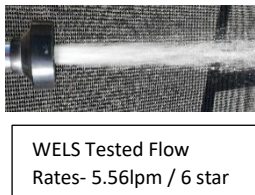

WELS Tested Flow Rates- 5.56lpm / 6 star



WELS Tested Flow Rates- 1.17lpm / 6 star

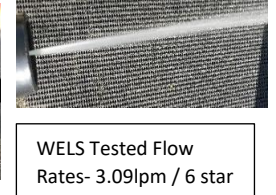

WELS Tested Flow Rates- 3.09lpm / 6 star

GLOBAL RINSE-MATE PRE-RINSES					
Item	Part No.	Description	Pot Filler	Standard	RRP \$
SPARE PARTS for HOB & WALL					
1	G8101	S/S Spring Guard – Standard Tall -Chrome	✓	✓	
2	G8101C	S/S Spring Guard – Café - Chrome	✓	✓	
3	GPRH0650S	S/S Armourflex PR Hose -650mm Cafe	✓	✓	
4	GPRH0900S	S/S Armourflex PR Hose -900 or 920mm		✓	
5	GPRH0970S	S/S Armourflex PR Hose -970mm	✓		
6	G5208	S/S Handle for Spray Gun- [S/S & Plastic]	✓	✓	
7	G2949-B	S/S Spray Valve	✓	✓	
8	G50TS-M-KIT	S/S Triple Spray Tip Kit, incl. Male	✓	✓	
9	G50ST	S/S Flat Fan Spray Nozzle-1/4" M + Washer	✓	✓	
10	G50BM-BK	Bumper - Black	✓	✓	
11	G8208SS	S/S Hook – 8" - CP	✓	✓	
12	GSR143812	S/S Spring Retainer - S/S	✓	✓	
13	GF8310	Wall Bracket- Adj. - CP Alloy Clamp & Flange w- 280mm S/S Rod	✓	✓	
14	GRM8016	Riser 16" - S/S - 3/8"		✓	
15	GRM8010	Riser 10" - S/S - 3/8"	✓		
16	GRM8004	Riser 4" - S/S - 3/8"	✓		
17	G-5012	Pot Filler + 12" S/S Spout - sizes available - 6, 8, 10, 12, 14"	✓		
18	GS03MK	S/S Tap Mounting Kit	✓	✓	
19	G03IH	Inlet Hoses - Pair	✓	✓	
20	G50KIT	S/S Spray Valve Repair Kit	✓	✓	
21	G25RK-SS	Pot Filler Repair Kit only	✓		
22	GECBTC	Tap Bib Top Repair Kit – Cold Side only	✓	✓	
23	GECBTH	Tap Bib Top Repair Kit – Hot Side only	✓	✓	
TAP BODIES – HOB & WALL					
24	GEC01	Hob / Deck – Single – non mixing	✓	✓	
25	GEC03	Hob / Deck – Single Hole Dual Mixing	✓	✓	
26	GEC05	Hob / Deck – Exposed Breach-Adjustable - Mixing	✓	✓	
27	GEC06	Hob / Deck – Outlet only – No tap	✓	✓	
28	GEC11	Wall / Splash Back – Single -Non-Mixing	✓	✓	
29	GEC13	Wall Stops, Hidden Breach- Fixed - Mixing	✓	✓	
30	GEC14	Wall / Splash Back - Exposed Breach- Adj. Straight Mixing	✓	✓	
31	GEC15	Wall / Splash Back - Exposed Breach- Adj. Elbow Mixing	✓	✓	
32	GEC16	Wall / Splash Back – Outlet Only - no tap	✓	✓	