


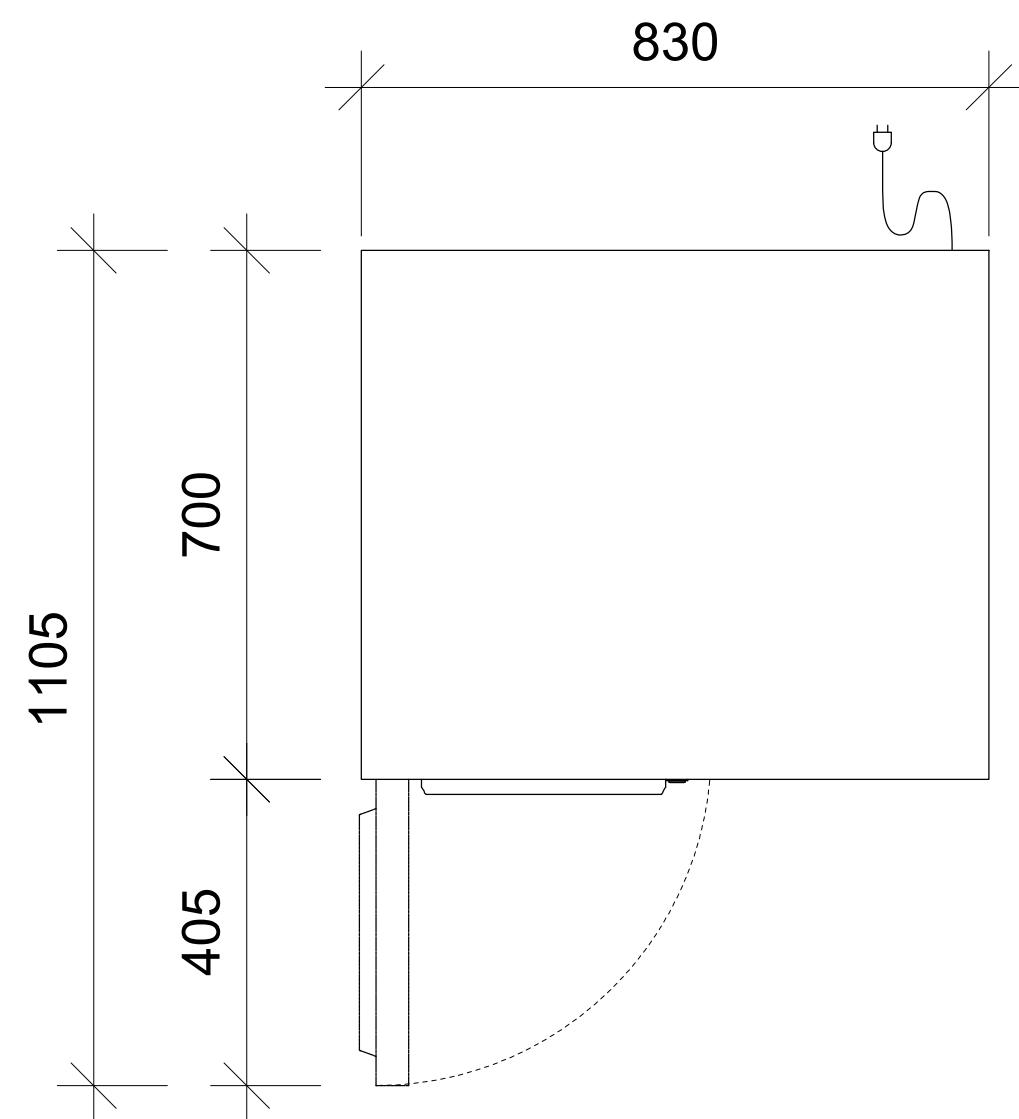


Cabinet Dimensions:


	External	Internal
Width (mm):	830	360
Depth (mm):	700	560
Height (mm):	860 to 900 (legs) 715 (plinth) 850 (standard castors)	610
Weight (kg):	50	
Capacity (L):	123	
Footprint (m ²):	0.58	
Electrical Voltage (V):	220-240	
Electrical Ampere (A):	2	
Electrical Frequency (Hz):	50	
MEPS TEC:	TBC	
Refrigerant:	R290 / 80g	

Dimensional Tolerances + Allow for dimensional tolerance when installing the cabinet(s).	
Linear Dimensions	Single Cabinet Dimensions
Less than 1 metre	+5mm
More than 1 metre	-5mm to +10mm
Length of Multiple Cabinets	
At each joint	At each end wall
+5mm	+15mm
-5mm to +10mm	+15mm

Side mount integral
refrigeration cartridge

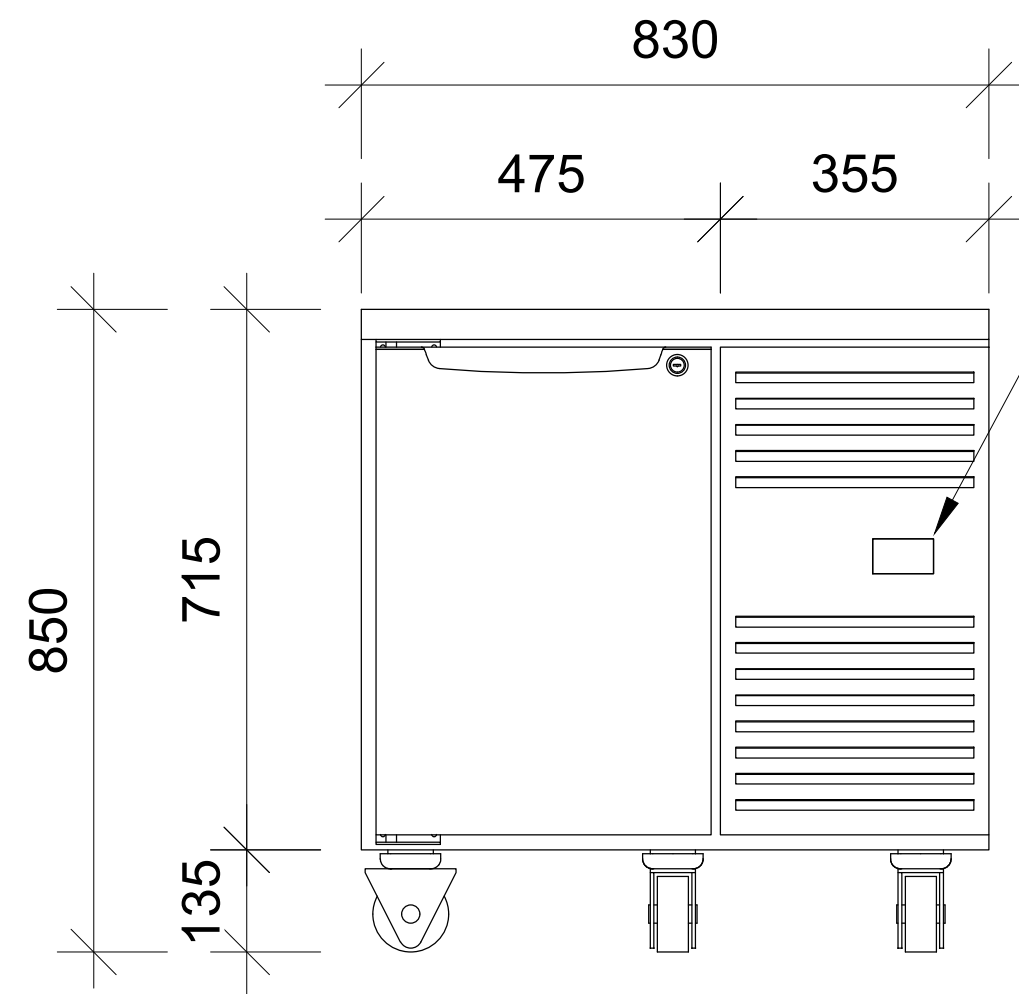


SKOPE-connect™
compatible controller

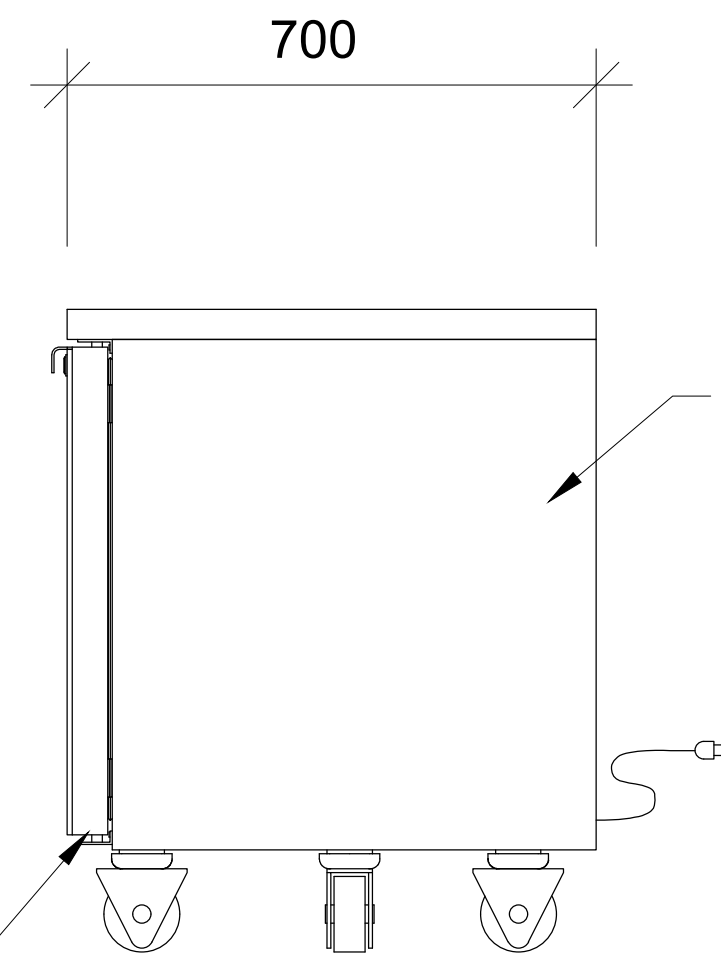

Stainless steel
interior and exterior

Coved internal floor

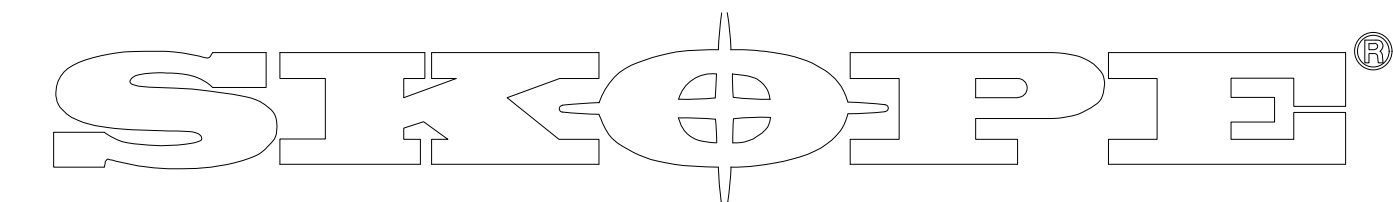

Industries Limited

66 Princess St. PO Box 1091
Christchurch, New Zealand
New Zealand Freephone: 0900 947 5673
Australian Freephone: 1800 121 535
Email: enquiry@skope.co.nz
Website: www.skope.co.nz

Model: PG11.UBR.1.SD.RH	
Description: One Solid Door Underbench GN 1/1 Right Hand Fridge	
Unless Otherwise Specified: Folded Dimension: Overall Linear Tolerances: ± 0.5mm Angular Tolerances: ± 0.5mm Units: Millimeters	Scale: 1 : 20
Copyright © SKOPE Industries Limited	Revision: