

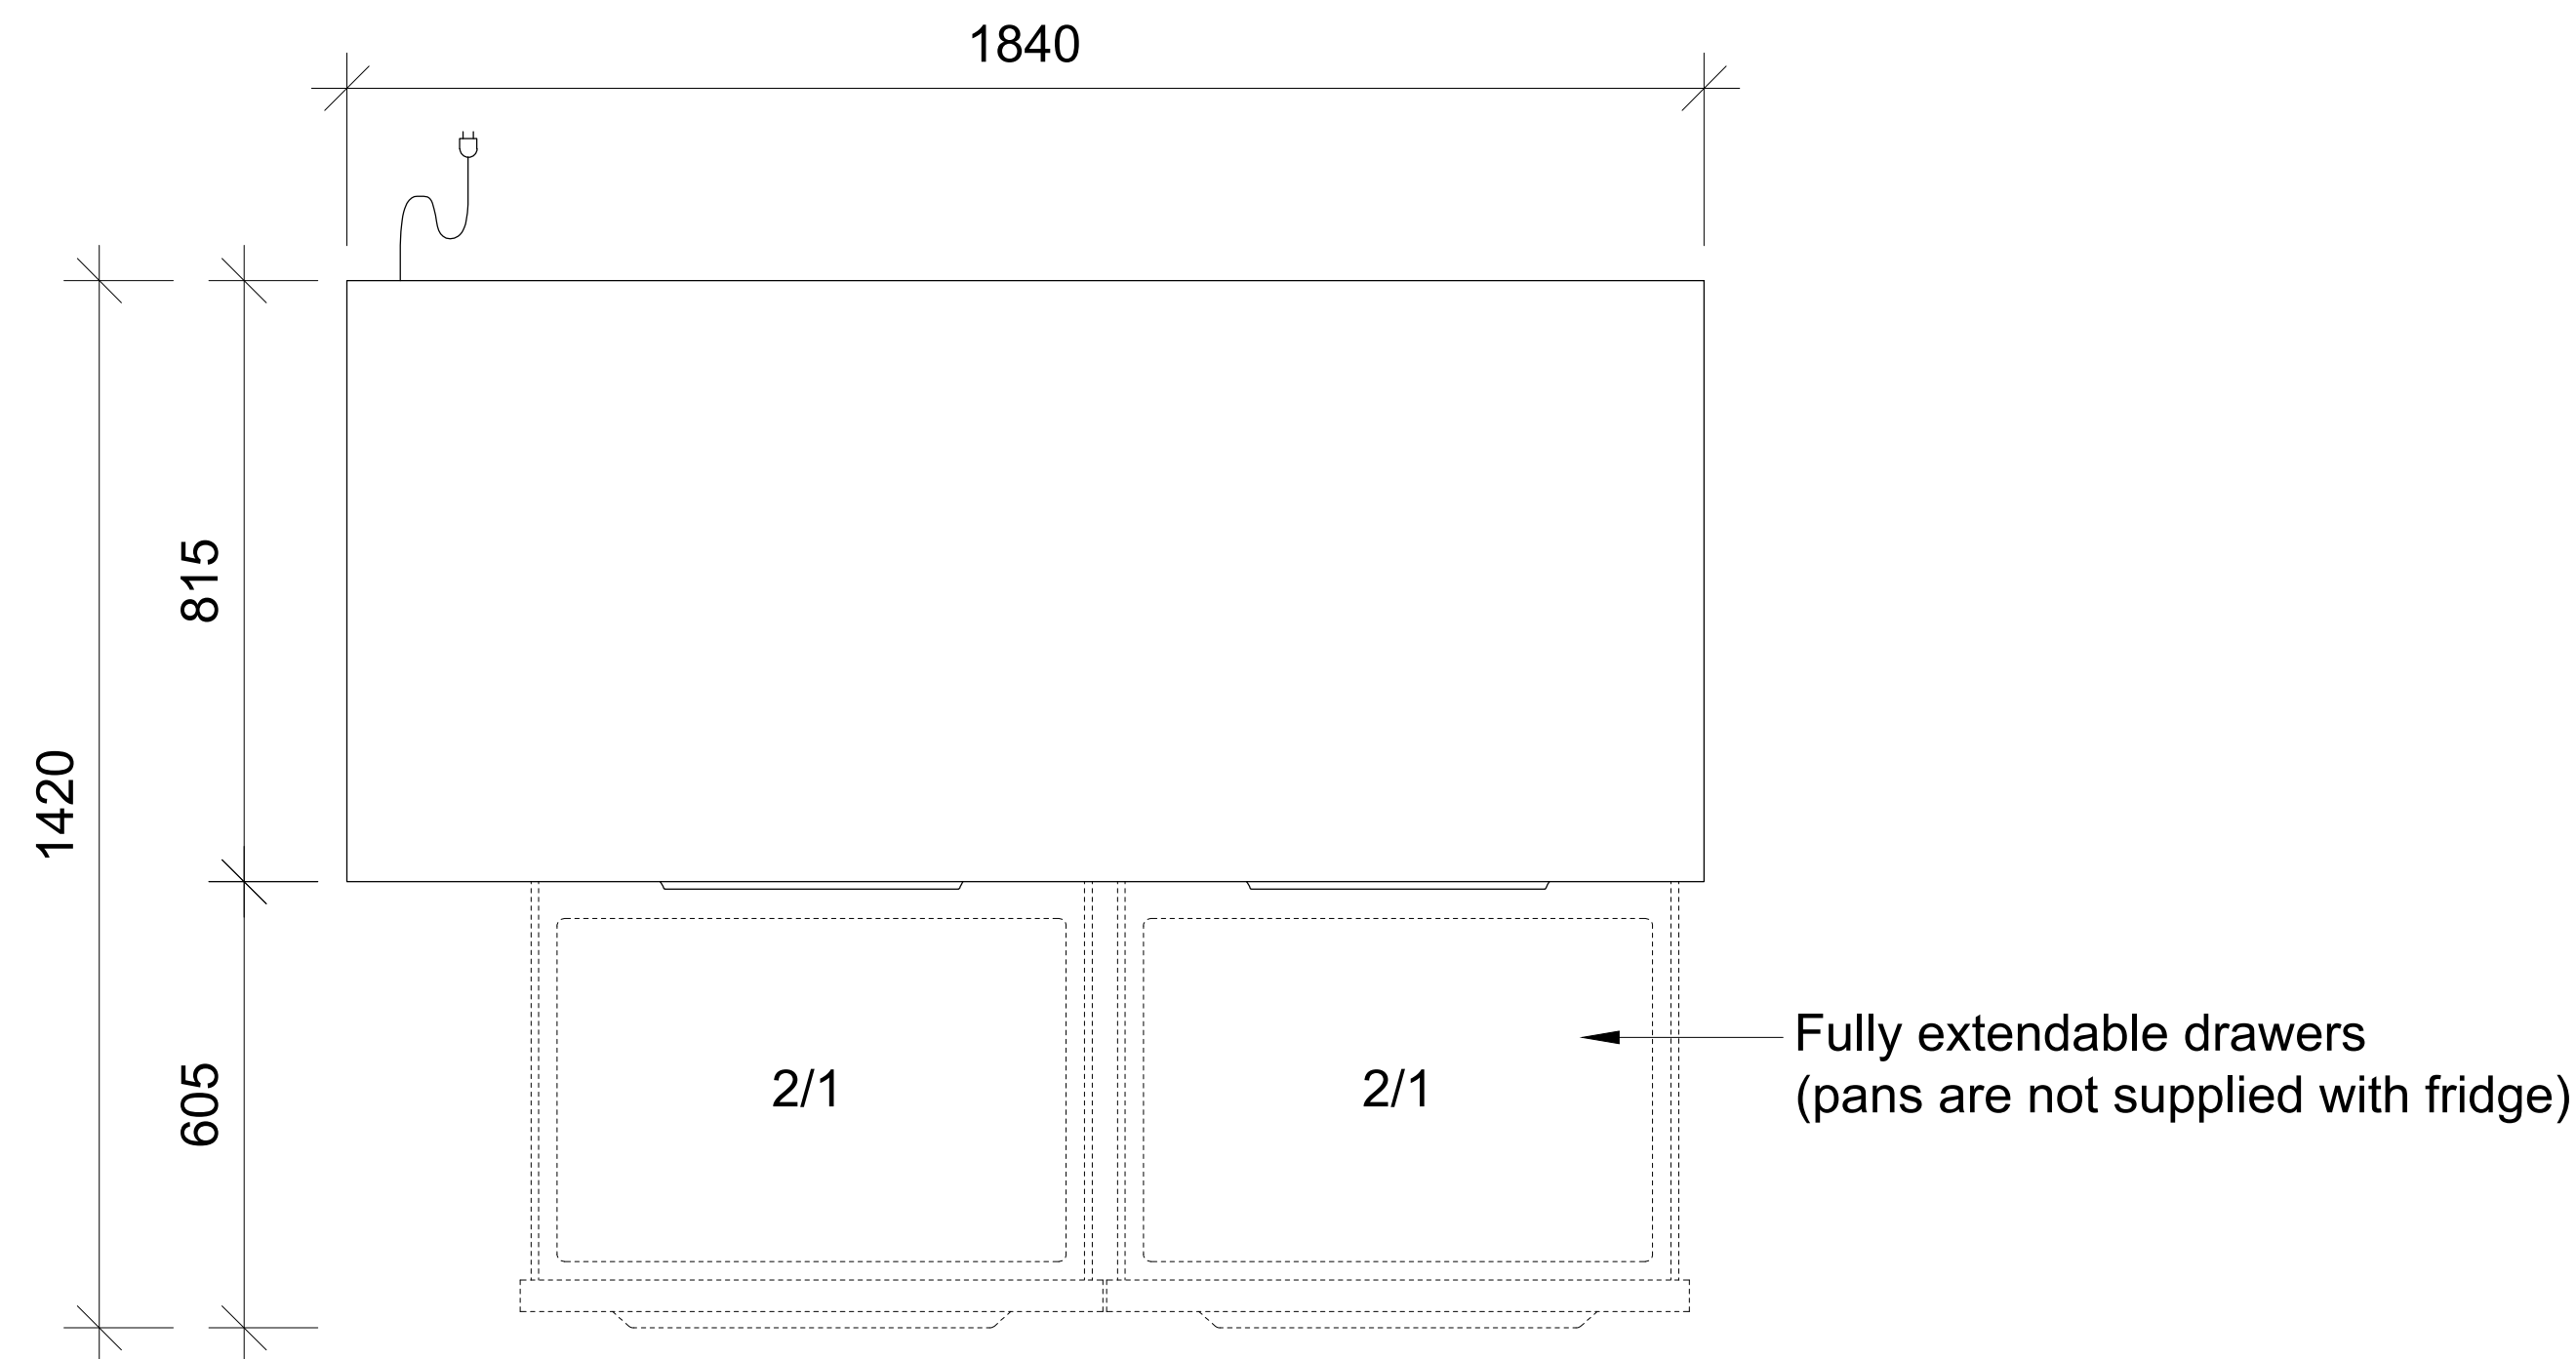


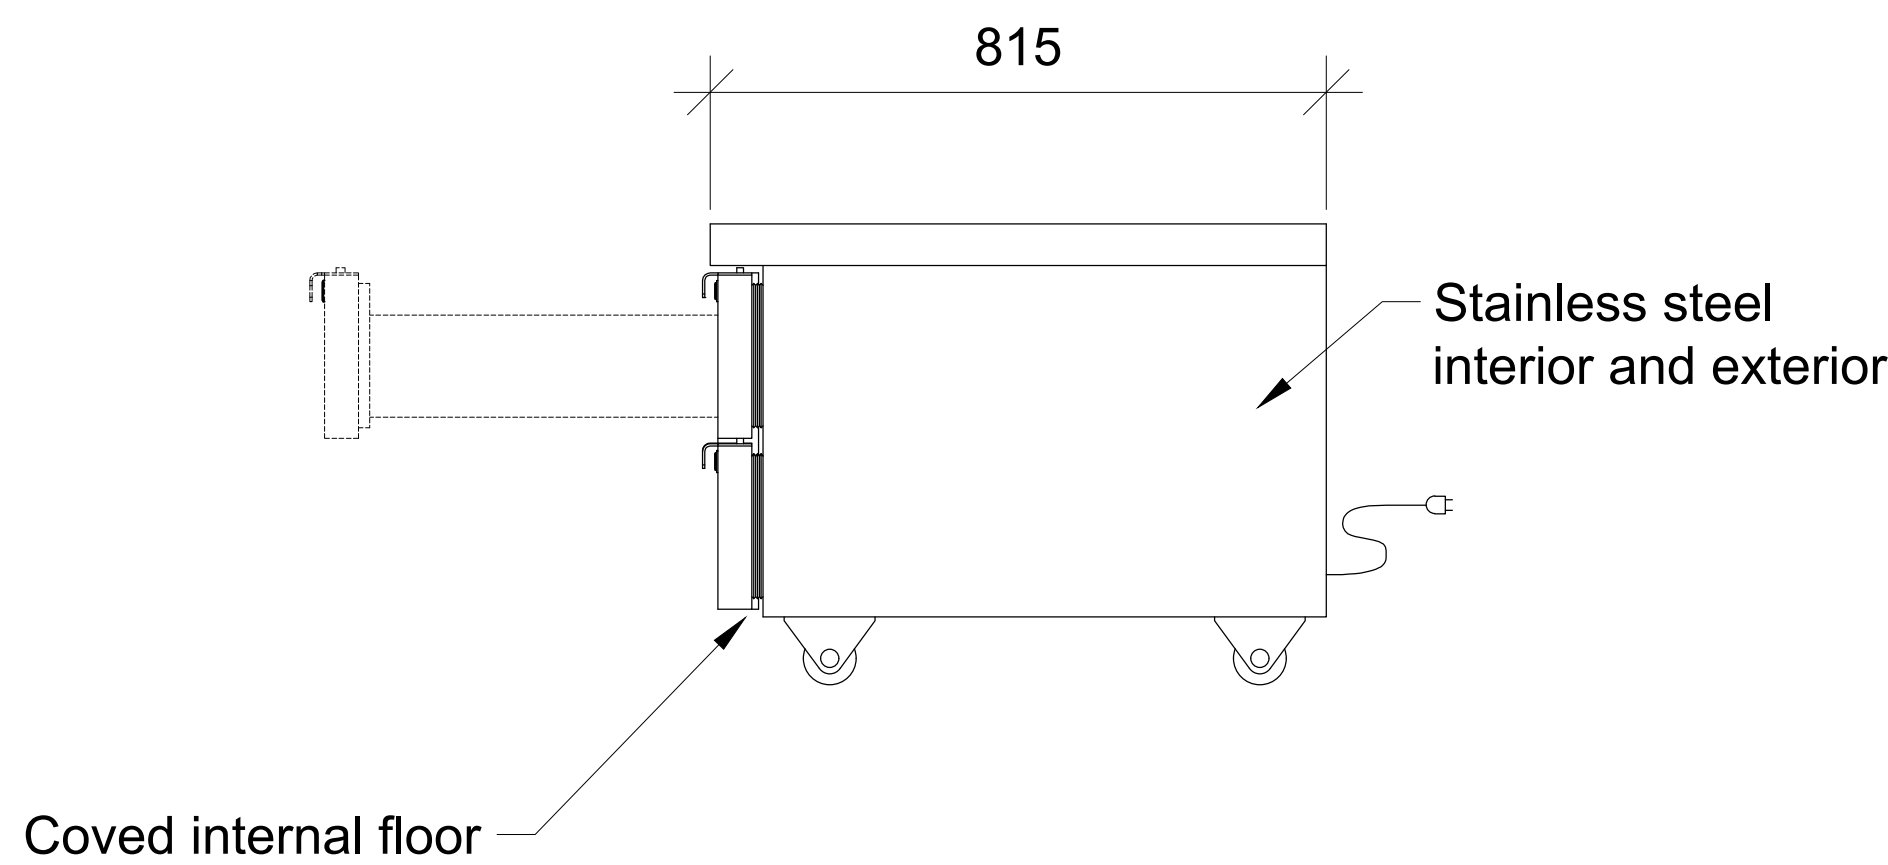

SKOPE-connect™ compatible controller

Side mount integral refrigeration cartridge

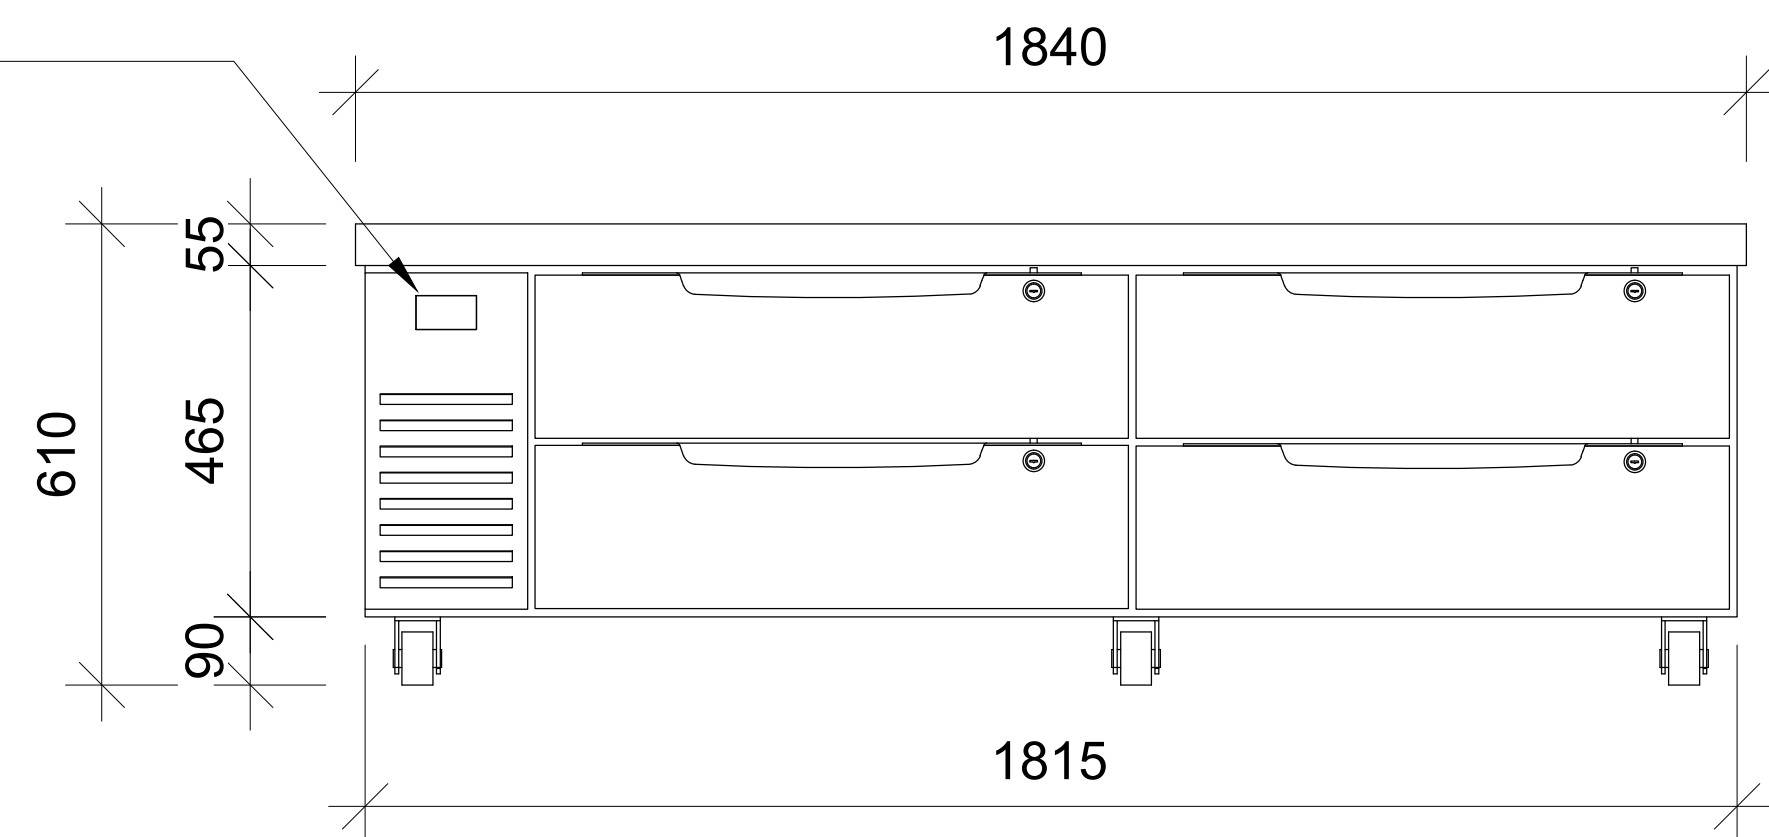


Cabinet Dimensions:

	External	Internal
Width (mm):	1840	1510
Depth (mm):	815	575
Height (mm):	665 to 705 (legs) 520 (plinth) 610 (standard castors)	385
Weight (kg):	160	
Capacity (L):	334	
Footprint (m²):	1.5	
Electrical Voltage (V):	220-240	
Electrical Ampere (A):	2	
Electrical Frequency (Hz):	50	
MEPS TEC:	TBC	
Refrigerant:	R290 / TBCg	

Dimensional Tolerances

+ Allow for dimensional tolerance when installing the cabinet(s).

Linear Dimensions	Single Cabinet Dimensions
Less than 1 metre	+5mm
More than 1 metre	-5mm to +10mm
Length of Multiple Cabinets	
At each joint	At each end wall
+5mm	+15mm
-5mm to +10mm	+15mm

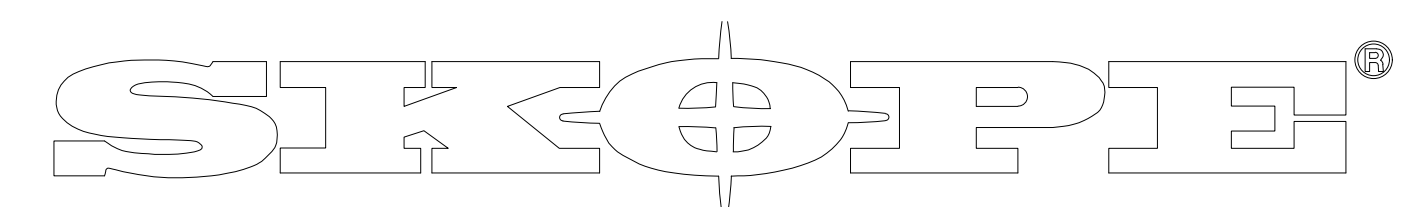

Industries Limited

66 Princess St. PO Box 1091
Christchurch, New Zealand
New Zealand Freephone: 0900 947 5673
Australian Freephone: 1800 121 535
Email: enquiry@skope.co.nz
Website: www.skope.co.nz

Model: PG21.CBR.2.D4		
Description: Four Drawer, Two Bay, ChefBase GN 2/1 Fridge		
Unless Otherwise Specified: Folded Dimension: Overall Linear Tolerances: ± 0.5mm Angular Tolerances: ± 0.5mm Units: Millimeters		Scale: 1 : 20
Copyright © SKOPE Industries Limited		Revision: