

Technical Specifications for EC7-2B



Induction Cooktops

- 5kW rapid induction high-frequency coil technology
- Able to operate at low heat for a consistent simmer
- Standard with rotary knobs for easy heat adjustment
- 8 level heat settings with LED visual power display
- Individual zones programmable with shut-off timers
- 6mm microcrystalline seamless and impact-resistant glass
- Auto detection turns heating off when pan is removed
- Evenly dispersed heating across entire cooking surface
- AISI grade stainless used on all external panels
- High quality engineering and craftsmanship throughout
- Integrated closed cabinet base stand

Connections






- Electric - hard wired or fit cable and plug (not supplied)

Options

- Benchtop mount (add -B suffix to model number)

INDUCTION

- Suitable for all types of pan/pot work
- Capable of boiling 2 litres of water in 3 minutes
- Rapidly heat or turn down for a consistent simmer
- Instant energy transfer into the base of the pan/pot
- Toughened 6mm thick microcrystalline ceramic glass
- User friendly with visual heat setting display and timer
- Lower ambient heat for a more comfortable kitchen
- 90%+ thermal efficiency results in lower energy costs
- Safer than gas with zero carbon emissions or combustion
- Durable, versatile, and easy to clean and service
- 2* Year Parts and Labour 'Platinum Warranty'

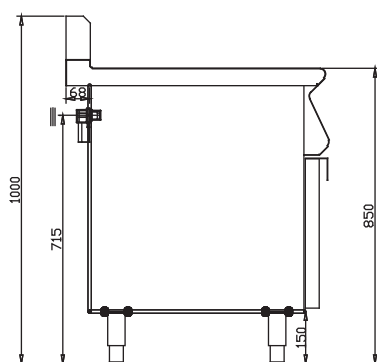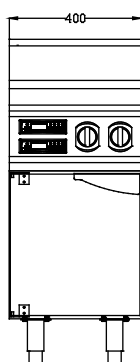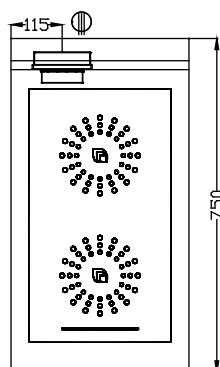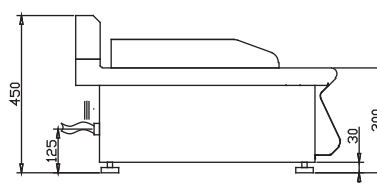

Model

EC7-2B
EC7-2B-B

Description

2 Zone Induction Cooktop
2 Zone Induction Cooktop

Dimensions

400w x 750d x 1000h
400w x 750d x 450h

Power

10kW, 13.9A, 3PH, 50Hz
10kW, 13.9A, 3PH, 50Hz