



OTSHC12



PRODUCT FEATURES

- Heated aluminium base and shelf
- Overhead ceramic heaters and LED lighting
- Digital thermostatic controller
- Ticket strips on shelf and base
- Removable stainless steel dividers to allow for varied spacings

On benchtop or drop-into benchtop

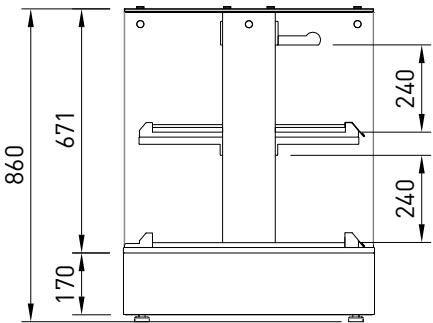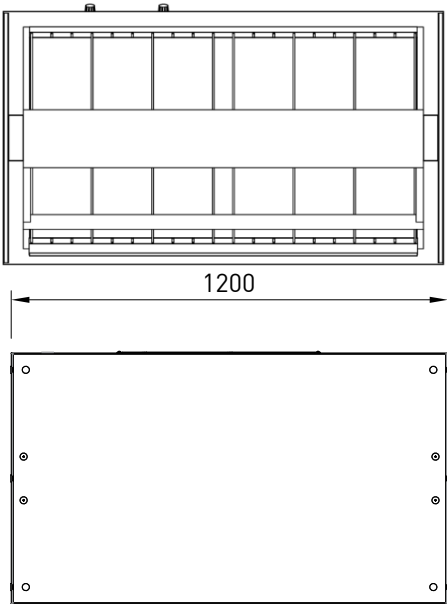

CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines and ventilation requirements document

MODEL	CABINET			BENCHTOP CUT OUT HOLE SIZE	SHELVING	OPERATING TEMP	SHELF	TOTAL FOOD	DISPLAY M ²	FREQUENCY	POWER		CONNECTION ELECTRICAL POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]								KW 230V	AMP	NZ/AUS 15 AMP 3 PIN PLUG	UK 13 AMP 3 PIN PLUG		LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT [KG]
OTSHC12	1200	690	860	126	1174 X 666	1 + BASE	75-85	1060 X 525	100	1.11	50Hz	2.07	9.0	15 AMP 3 PIN PLUG	220-240V	1300	770	1000	133


OTSHC15



PRODUCT FEATURES

- Heated aluminium base and shelf
- Overhead ceramic heaters and LED lighting
- Digital thermostatic controller
- Ticket strips on shelf and base
- Removable stainless steel dividers to allow for varied spacings

On benchtop or drop-into benchtop

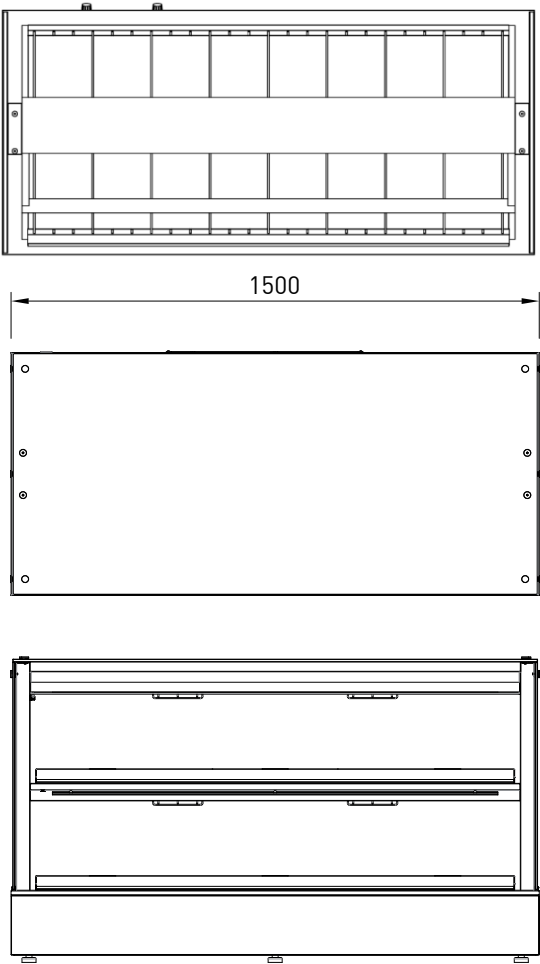

CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines and ventilation requirements document

MODEL	CABINET				BENCHTOP CUT OUT HOLE SIZE	SHELVING	OPERATING TEMP	SHELF	TOTAL FOOD	DISPLAY M ²	FREQUENCY	POWER		CONNECTION ELECTRICAL POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT [KG]	W X D		DEG C	W X D	100MM UNITS			KW 230V	AMP	NZ/AUS	UK 13 AMP		LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT [KG]
OTSHC15	1500	690	860	158	1174 X 666	1 + BASE	75-85	1360 X 525	130	1.43	50Hz	2.96	12.7	LEAD ONLY	LEAD ONLY	220-240V	1600	770	1000	166




OTSHC18



PRODUCT FEATURES

- Heated aluminium base and shelf
- Overhead ceramic heaters and LED lighting
- Digital thermostatic controller
- Ticket strips on shelf and base
- Removable stainless steel dividers to allow for varied spacings

On benchtop or drop-into benchtop

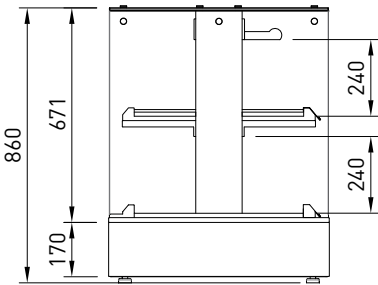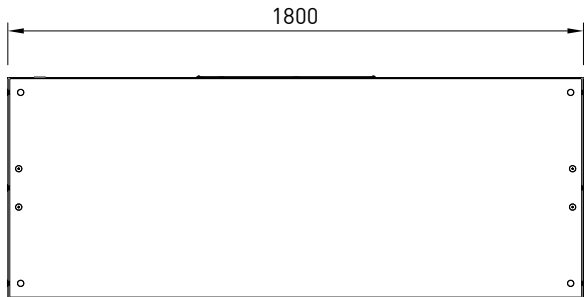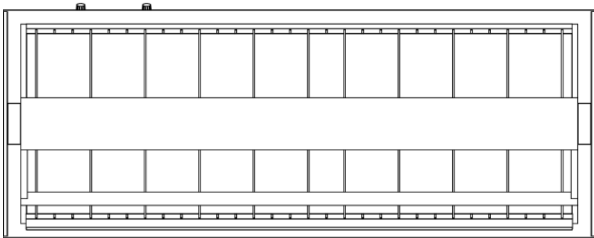

CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines and ventilation requirements document

MODEL	CABINET				BENCHTOP CUT OUT HOLE SIZE	SHELVING	OPERATING TEMP	SHELF	TOTAL FOOD	DISPLAY M ²	FREQUENCY	POWER		CONNECTION ELECTRICAL POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]									KW 230V	AMP	NZ/AUS	UK 13 AMP		LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT [KG]
OTSHC18	1800	690	860	189	1174 X 666	1 + BASE	75-85	1660 X 525	160	1.74	50Hz	3.85	16.5	LEAD ONLY	LEAD ONLY	220-240V	1900	770	1000	200